




FLEXIBLE HOSES

FH SERIES

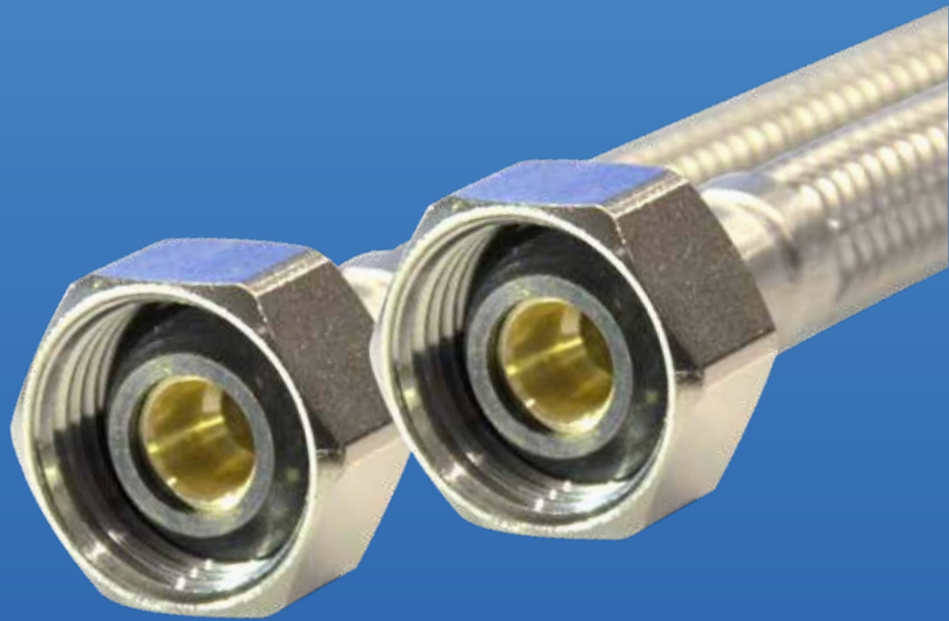

Applications

- Kitchen
- Laundry
- Bathroom

Specifications

- 304 Stainless Steel Braided
- Watermarked Approved
- Rated working pressure of 1500Kpa
- Maximum working temperature 70°C

Features

- Resistant to cutting and abrasion
- Resistant to rust
- Swivel Connection
- Soft PEX inner core



Austworld
PO Box 311
Ashmore City
QLD 4214

P: 1300 780 430
F: 1300 780 441
E: info@austworld.com.au
W: www.austworld.com.au




DISCLAIMER: AS PART OF AUSTWORLD COMMITMENT TO QUALITY PRODUCTS, AUSTWORLD RESERVES THE RIGHT TO ALTER THE DESIGN OR SPECIFICATION OF ITS PRODUCT WITHOUT NOTICE. THE PRODUCT IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY AND MAY NOT BE AN EXACT REPRESENTATION OF THE PRODUCT

Ver 1.0



FLEXIBLE HOSES

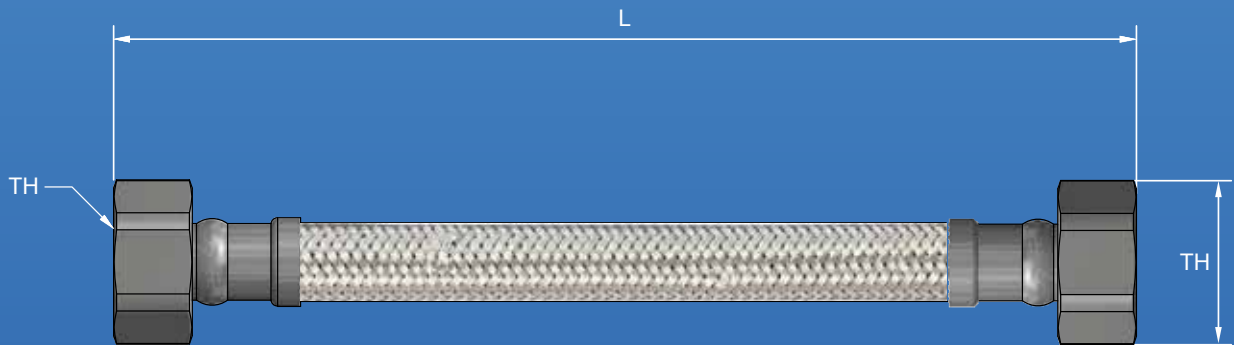

Sizing Chart MM

	L	TH
FH150	150	G 1/2"
FH225	225	G 1/2"
FH300	300	G 1/2"
FH450	450	G 1/2"
FH600	600	G 1/2"
FH1000	1000	G 1/2"
FH20700	700	G 3/4"



Austworld
PO Box 311
Ashmore City
QLD 4214

P: 1300 780 430
F: 1300 780 441
E: info@austworld.com.au
W: www.austworld.com.au

